



(43) International Publication Date
27 May 2004 (27.05.2004)

PCT

(10) International Publication Number
WO 2004/044466 A1

(51) International Patent Classification⁷: **F16K 11/10**,
F04D 27/02, F16K 11/044, 17/04

(21) International Application Number:
PCT/GB2003/004914

(22) International Filing Date:
12 November 2003 (12.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0226349.9 12 November 2002 (12.11.2002) GB
0323182.6 3 October 2003 (03.10.2003) GB

(71) Applicant (for all designated States except US): **DUN-
LOP AEROSPACE LIMITED** [GB/GB]; Holbrook
Lane, Coventry, West Midlands CV6 4AA (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **TEBBY, Stephen**,
Walker [GB/GB]; 8 St Mary's Close, Southam, Warwick-
shire CV47 1EW (GB).

(74) Agent: **SHAW, Laurence**; Laurence Shaw & Associates,
Metropolitan House, 1 Hagley Road, Edgbaston, Birming-
ham B16 8TG (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

[Continued on next page]

(54) Title: VALVE

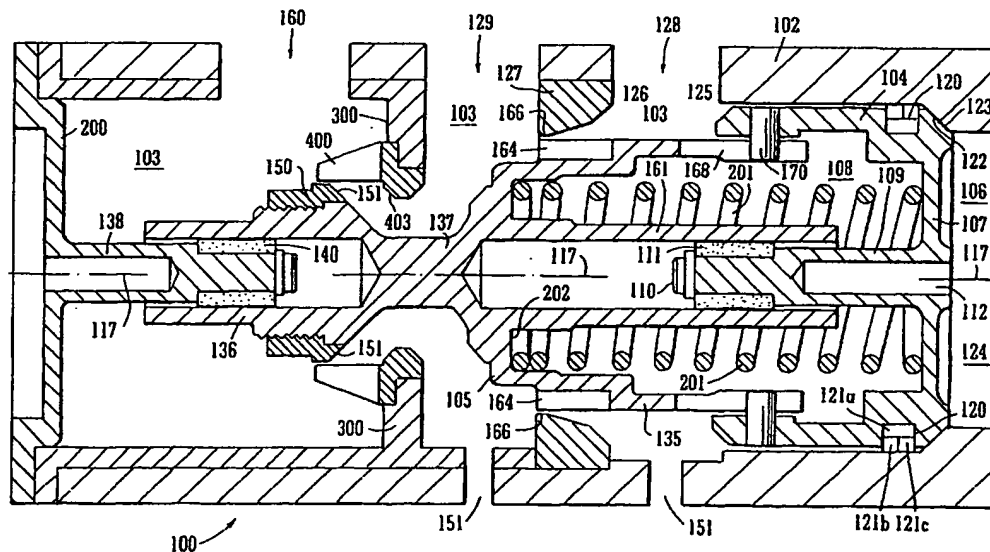

(57) Abstract: A valve body (2, 102) comprises two inlet ports for receiving fluid at respective different pressures, an outlet port for delivering said fluid, a valve member (5, 105) mounted for limited movement within said body, and biasing means (60, 201) for biasing said valve member to move to one limit of its movement, said valve member being operable to move in response to the difference in pressure at said first and second ports in response to said biasing means for causing the valve member to vary the respective contributions of fluid delivered to the outlet port from the inlet ports. The valve body can contain a further movable valve member (4, 104) which is operable for receiving fluid from isolating control means and, in response thereto, for moving to obstruct one of said inlet ports and for urging the first mentioned valve member to obstruct the other inlet port.

WO 2004/044466 A1